

A COMPARISON OF SYSTEMS AND TOOLS FOR 3D SCANNING

F.B. ter Haar^a, P. Cignoni^b, P. Min^a, R.C. Veltkamp^a

^a*Institute of Information and Computing Sciences, Utrecht University, the Netherlands*

^b*Istituto di Scienza e Tecnologie dell'Informazione - Consiglio Nazionale delle Ricerche, Pisa, Italy*

KEY WORDS: Range scanning, Registration, Range scan alignment, Surface Matching

ABSTRACT:

Many 3D scanning systems and software tools are currently available, but a comparative study of their actual precision and robustness still lacks. To this end, this paper presents a comparison of such systems, taking into consideration three alignment tools and two merging tools for the management of scanned data. The comparison will be based on the scanning and reconstruction of two relatively complex artistic sculptures and a number of “ground truth” objects. The quality of the reconstructed 3D models is evaluated using both qualitative and quantitative measures. Quantitative evaluation is performed using Metro, a tool for computing differences between 3D meshes.

1. INTRODUCTION

The process of reconstructing a 3D computer model out of a set of range scans has been a well studied field of research for several decades. During these years various techniques and software tools were developed to aid with the reconstruction of a 3D model, based on two different trends in reconstruction sequences.

The first type is to turn the range scans directly into meshes, which is often done automatically by the scanning software, and then to perform the alignment and merging of these meshes to obtain the 3D model. The second type is to align the range scans first and then to reconstruct the surface from the unorganized set of 3D points, which results in the final 3D model.

This paper presents a comparison of software tools based on the first type of reconstruction sequence, which may restrict the user to use meshes only. For the alignment of meshes the following tools are compared: *MeshAlign* (VCLab, 2005), *RapidForm* (INUS Tech., 2005) and *Scanalyze* (Stanford, 2005). The tools that are compared with respect to the merging of meshes are *MeshMerge* (VCLab, 2005) and *RapidForm* (INUS Tech., 2005). At this moment, the merging using the VRIP algorithm provided by Stanford has not been included yet.

The Iterative Closest Point (ICP) algorithm has become the dominant method for the alignment of pairs of meshes based purely on the geometry. This pairwise ICP algorithm starts with an initial guess for the relative rigid-body transformation of two meshes. Then the algorithm iteratively refines this transformation by repeatedly selecting pairs of corresponding points on the meshes while minimizing an error metric. Many

variants of the pairwise ICP algorithm have been introduced, which are compared based on their convergence speed using three test scenes (Rusinkiewicz and Levoy, 2001).

The reconstruction of a 3D model involves the alignment of multiple meshes. The pairwise ICP algorithm will sequentially align all pairs of range scans, which may result in the accumulation of alignment errors. To avoid this, a global alignment step is often applied to spread the alignment error evenly across the available mesh pairs (Pulli, 1999; Neugebauer, 1997). The pairwise ICP algorithm followed by the global alignment step will be referred to as the *fine alignment* of the meshes. In this paper the accuracy of the tools will be compared regarding the fine alignment.

Before the fine alignment can be applied the meshes should be roughly aligned first. There are several options for performing the rough alignment:

Manually by using an input method able to rotate and translate each mesh.

Semi-automatically by manually selecting a few corresponding points for each pair of (partially) overlapping meshes. The selected points are used to automatically rotate and translate one mesh to the other.

Automatically by using techniques based on, for example, principal axes computation (Chung et al., 1998), exhaustive search for corresponding points (Chen et al., 1999; Cheng and Don, 1991) or matching surfaces signatures. Examples of such signatures are spin-images (Johnson, 1997), point-signatures (Chua and Jarvis, 1997), bitangent curves (Wyn-gaerd et al., 1999) or spherical attribute images (Higuchi et al., 1995).

In this paper the various ways of performing the rough

* Contact email: fhaar@cs.uu.nl

alignment are not taken into account. The rough alignment will be obtained using just the semi-automatic technique.

After the alignment, a merging step has to be applied to obtain a single 3D mesh out of a set of aligned meshes. Two possible techniques to merge meshes are a surface zipping technique (Turk and Levoy, 1994) or a volumetric approach based on a discrete distance field (Curless and Levoy, 1996). Many variants of the volumetric approach were developed (summarized in (Rocchini et al., 2004)).

In this paper, we use five objects to reconstruct a model from, two physical and three “synthetic” objects (i.e. created using a 3D modeller). Range scans of the physical objects were acquired using the *Roland LPX-250* laser range scanner. The quality of the resulting models will be evaluated using several quantitative measures like the Hausdorff distance and the mean distance. The results of the alignment and merging of synthetic range scans are compared with their original *reference* models, which will provide information about the performance of the applied tools. For the physical objects we have created plausible *reference* models using a different scanner, the *Minolta Vivid 910*.

The rest of this paper is organized as follows. We first present the methodology used for comparing the alignment and merging tools using a model reconstruction pipeline. Next, a more descriptive overview of the pipeline is given together with the contribution of each evaluated tools to this pipeline. Followed by results and conclusions.

2. METHOD

First, we give a high-level overview of the acquisition and reconstruction pipeline that is used to create a 3D model out of an object using the various tools. Then, the evaluation of the results, during and after the reconstruction phase, is described.

2.1. Acquisition and reconstruction

This paragraph describes the acquisition and reconstruction pipeline shown in figure 1.

Objects

We have used two physical objects and three synthetic objects. The physical objects are the *UU-memento* and the *pierrot*. The three synthetic objects are the *knot*, *armadillo* and *dragon* (see figure 2).

View selection

During the view selecting the object is placed with a view of interest towards the scan device. This may include the manually placement of an object in front

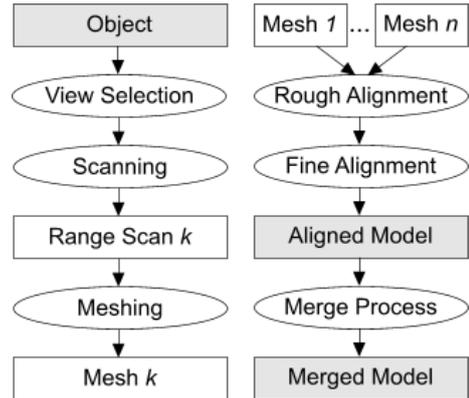


Fig. 1. The pipeline of the model reconstruction. The boxes shown in gray show the models used during the evaluation.



Fig. 2. The objects used in the comparison. From left to right. Top: The physical objects *UU-memento* and *pierrot*. Bottom: The synthetic objects *knot*, *armadillo* and *dragon*.

of the range scanner, the selection of a rotation angle in case of a rotation table, or the selection of a different viewing direction of the synthetic object. The view selection is performed several times to obtain a set of range scans from which a 3D computer model can be constructed.

Scanning

The scanning includes scanning using a laser range scanner in case of the physical objects as well as synthetic scanning. Synthetic scans are generated for the synthetic objects by storing the nearest Z-axis values of the object’s surface for a grid with a predetermined resolution. This grid will be called the *Z-buffer*. The range scans at this stage are clouds of points scanned by the scanning device.

Meshing

The meshing includes two tasks: The triangulation of the point clouds which results in a surface mesh and

the cleanup of these meshes by removing noise, incorrect faces and small patches. The obtained meshes are aligned and merged using the tools mentioned in the introduction.

Rough alignment

When all range scans are converted into triangular meshes. Then the meshes are placed into an initial rough alignment. The result is a set of meshes in a single coordinate system.

Fine alignment

The roughly aligned meshes are fine aligned using the global ICP algorithms of the alignment tools.

Merging

The aligned meshes are merged into a single mesh using several merging tools based on either the surface zipping technique or a volumetric based approach.

2.2. Evaluation

To evaluate the tools, we will compare the results of the alignment and the results of the merging. For all objects these results are compared with their reference model using *Metro* (Cignoni et al., 1998). For the physical objects, this means we have to construct reference models first. We will also have a closer look at some particular features of the meshes before and after the merging process.

3. METHOD IMPLEMENTATION

3.1. Objects

The objects used in this paper are selected for their different properties in shape, appearance and manufacturing.

- The *UU-memento* is a dark, reflective object with many protrusions and is approximately 111 mm high.
- The *pierrot* is the combination of a white body and a black hat and has a height of 60 mm.
- The *knot* is a model we constructed our self using 3D Studio MAX and has many occlusions that would be physically hard to scan with a range scanner if it were a physical object. This model has of 478,704 vertices and 957,408 faces.
- The *armadillo* is a reconstructed models of ≈ 70 range images using techniques described in (Curlless and Levoy, 1996). It has 172,974 vertices and 345,944 faces.
- The *dragon* is reconstructed in the same way as the *armadillo* and has 437,645 vertices and 871,414 faces.

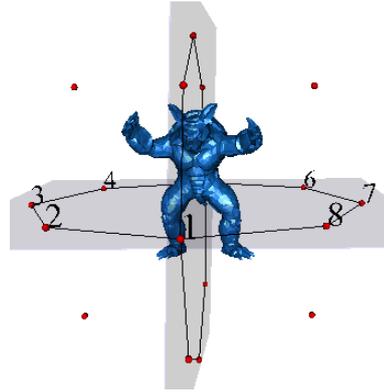


Fig. 3. The view selection for the synthetic objects. Different views are obtained by looking from different locations to the origin.

3.2. View selection

The physical objects were scanned using a laser range scanner which performs plane scanning. Each object was scanned from twenty different directions. Eight range scans were obtained by scanning every 45° degrees when placed upwards with its characteristic side to the scan device. Then the object is also scanned for every 45° degrees when placed on its side, also with its characteristic side directed to scan device if possible. Finally the object is scanned every 90° degrees for a different pose to scan parts of the object that were not well covered during the previous two series. Scanning the object in this way will cover most of its surface. For the synthetic objects this view selection methodology is simulated using the same three series of views following a pre-defined sequence using locations on a unit sphere (see figure 3). The first two series of views, which are highlighted using two gray planes in figure 3, have two common view locations (location number 1 and 5). For the second series we skip these two locations, thus for the synthetic objects we have eighteen views instead of the twenty views we have for the physical objects.

3.3. Scanning

The *UU-memento* and the *pierrot* were scanned using the *Roland LPX-250*. The *Roland LPX-250* is a laser range scanner with a rotation table, which sequentially samples points on the surface of the object from left to right and from bottom to top. By rotating the laser clockwise and its table counter clockwise both for a small scope, this scanner creates an orthogonal surface scan. The highest possible resolution of this scanner is 0.2×0.2 mm and can be increased in steps of 0.2 mm both horizontally and vertically. The objects were scanned using a scan resolution of 0.4×0.4 mm, because the highest resolution resulted in too noisy range scans for the selected objects. These range scans will be available in the AIM@SHAPE shape repository (AIM@SHAPE Repository, 2005).

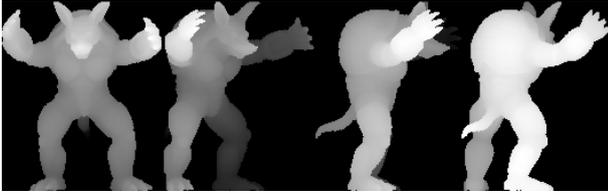


Fig. 4. The Z-buffers of the first four selected views in case of synthetic scanning.

Parameter description	Parameter	Value
Scan resolution	res	0.4×0.4 mm
Synthetic object height	$height$	100 mm
Threshold angle	t_α	80°
Threshold edge length	t_e	$4 \times res$
Threshold patch size	t_p	100 faces

Table 1
Parameter settings used during the experiments.

Because the synthetic objects are normalized, they are scaled to a size comparable to the physical objects. Then we will obtain a mesh with the same resolution as the physical objects, by selecting the A synthetic range scan equals the depth of the Z-buffer of the scene with the required resolution. The Z-buffers of the first four views are shown in figure 4.

3.4. Meshing

The *Roland LPX-250* applies a simple mesh reconstruction technique, which connects the adjacent sample points using quadrilaterals and triangles. The quadrilaterals are then triangulated by connecting the two closest corners. During this meshing no distance criteria for edges or other filtering is applied. Before the meshing, the range scans may suffer from outliers and noise. These outliers cause incorrect faces in the reconstructed mesh. Other incorrect faces are due to occlusion.

The Z-buffers of the synthetic range scans are converted to triangular surface meshes by connecting adjacent foreground pixels and projecting these pixels to their 3D coordinates using their depth values from the Z-buffer. These meshes also suffer from incorrect faces due to occlusion.

The meshes were cleaned in a similar way as described by (Johnson, 1997). The cleaning of the meshes includes thresholding the angle between the viewing direction and the surface normal (t_α). Values for this threshold often vary between 76° and 81° . Other cleaning operation applied on the meshes are the removal of long edges compared with the scan resolution (t_e), the removal of small patches (t_p) and the removal of disconnected vertices. Table 1 shows reasonable values for these parameters which were empirically determined. Afterwards, the final meshes will still contain some noise despite the filtering of many incorrect faces.

3.5. Rough alignment

The alignment tools considered in this paper are all semi-automatic techniques that require an initial rough alignment of the meshes. The rough alignment is performed using four manually selected correspondence points on overlapping meshes. All meshes are transformed to the coordinate system of the mesh of the frontal view of the object (the first range scan). This set of transformation matrices are determined only once for each object, and used to create a set of transformed meshes. The set of transformed meshes is used throughout the rest of the paper to ensure the comparison is performed correctly.

3.6. Fine alignment

The roughly aligned meshes are fine aligned using the tools described in the following paragraphs. For each tool some parameters must be set. The parameters can be classified into two groups: parameters that restrict neighbouring meshes to form a pair, like a minimal amount of grid overlap, and parameters that determine the stopping criteria of the pairwise ICP algorithm, like a target alignment error or the number of applied iterations.

MeshAlign

MeshAlign v.2 is a system developed by ISTI-CNR (VCLab, 2005) that allows the registration of multiple meshes using a global ICP algorithm based on the multi-view registration for large datasets described in (Pulli, 1999). This system is especially designed to support the management of a large number of meshes (Callieri et al., 2003). This tool has a large number of ICP parameters that can be adjusted.

RapidForm

RapidForm 2004 (INUS Tech., 2005) is a commercial system able to perform every step of the 3D reconstruction pipeline as well as many other 3D modelling operations. The fine alignment performed by this system can be influenced by changing the number of iterations, changing the target alignment error and whether outliers should be included during the alignment or not.

Scanalyze

Scanalyze is a software distribution developed by Stanford's Computer Graphics Laboratory (Stanford, 2005) that can use one of the variants of the pairwise ICP algorithms described in (Rusinkiewicz and Levoy, 2001). This systems automatically fine aligns all meshes by changing the parameters of the global ICP algorithm while it iteratively aligns neighbouring meshes. Another way of using this system is by applying pairwise ICP on manually selected overlapping

meshes and storing the corresponding samples for the global alignment, which allows the user to adjust more ICP settings. In this paper only the automatic fine alignment is considered.

The ICP settings predominate whether the rough aligned meshes are “correctly” fine aligned or not. During the fine alignment, convergence of the iterative process should be reached, so other stopping criteria are set to unreachable values.

To improve the results of the fine alignment it is best to perform the fine alignment twice using different settings. The first time, the fine alignment should have little restrictions on the mesh pair selection. This way we ensure that the pairwise ICP algorithm is applied even on poorly aligned meshes and their neighbouring meshes. The second run should have more restrictions on the mesh pair selection, because mesh pairs that barely overlap (less than 30%) can have a negative influence on the total alignment error of the model.

3.7. Merging

The aligned meshes are merged using the tools described below. When the original meshes contain no noise (which is the case for the synthetic meshes) the merged model will consist of a single mesh. But, most of the noise in the meshes from the physical objects will become separated from the object’s surface during the merging of the meshes, which results in small patches “floating” around this surface. These patches are removed and only the final merged model is retained.

MeshMerge

MeshMerge (VCLab, 2005) is a tool that merges the meshes based on the volumetric approach. *MeshMerge* stores the locations of intersection between the meshes and the reference voxel grid. The distances between these intersections are used during the merging process instead of the distances of meshes within the voxel grid. This way *MeshMerge* reduces the computational costs during merging (Rocchini et al., 2004). This tool has many parameters that can be set concerning its voxel grid, distance field and smoothing steps, that all effect the final result. In this paper, we only adjust the resolution of the voxel grid.

RapidForm

RapidForm provides two kinds of merge tools, one is surface zipping based and the other is based on the volumetric approach.

The volumetric approach is applied using two different resolutions for its voxel grid. One resolution approximates the scan resolution (0.37×0.37 mm) and the other has a resolution which is two times higher (0.185×0.185 mm).

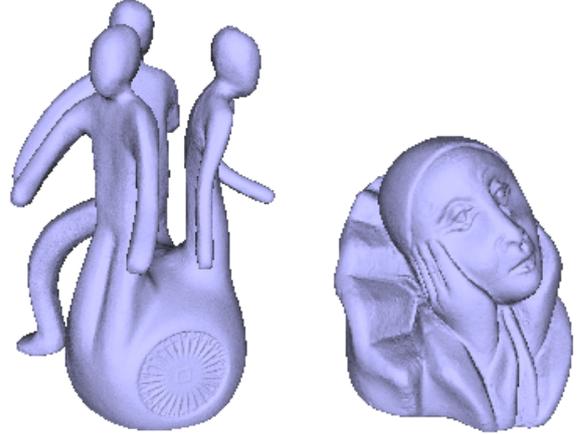


Fig. 5. The reference models of the *UU-memento* and the *pierrot*.

4. EVALUATION

The evaluation is performed using reference models. For the physical objects this means we have to create these reference models first. Those models should have a high level of accuracy and may not introduce a bias in the evaluation process. Therefore, the *UU-memento* and the *pierrot* were covered with a very thin layer of mat white paint first, to improve the accuracy of the range scans. A mat white surface is generally believed to be the most suited surface for scanning using a laser range scanner. Then, the objects were scanned using a different laser range scanner, the *Minolta Vivid 910*. This way the bias of the reference model towards a particular tool is reduced. The reconstruction of the 3D models was performed using *MeshAlign* and *MeshMerge*. Finally, we used two post-processing tools *Easy3DEdit* (VCLab, 2005) and *RapidForm* to turn each merged model into one clean manifold surface mesh without holes or degeneracies. The final reference models of the *UU-memento* and the *pierrot* are shown in figure 5 and will also be available in the AIM@SHAPE shape repository (AIM@SHAPE Repository, 2005).

For the evaluation a tool called *Metro* (VCLab, 2005) is used. *Metro* is a mesh comparison tool that is able to compare two 3D models of not necessarily connected meshes by the use of vertex, edge and/or face samples. For the sample points (p) from the first model (M_1), *Metro* determines the minimal Euclidean distance (d) to the second model (M_2) and computes:

$$e(p, M) = \min_{p' \in M} d(p, p')$$

$$E_{hd}(M_1, M_2) = \max_{p \in M_1} e(p, M_2)$$

$$E_{mean}(M_1, M_2) = \frac{1}{|M_1|} \int_{M_1} e(p, M_2) dM$$

in which E_{hd} represents the directed Hausdorff distance, which equals the maximum distance value for all samples. These distance measures are also determined for samples from the second model to the first.

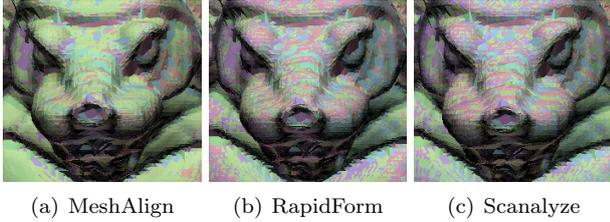


Fig. 6. The accurate alignment results of the *armadillo* using a different colour for each mesh. The colour distribution of the face shows a small difference in performance.

During the alignment and merging of the meshes the model can slightly rotate and translate. To compensate this, two compared models are fine aligned before comparison. Then the performance of the tools with respect to the range scans are measured by comparing the aligned model and the merged model with their reference model.

The aligned model is a set of meshes with intersecting and overlapping faces while the vertices still represent all data obtained during the scan process. Therefore, we measure the distance of the aligned model with respect to the reference model using vertex sampling and one direction only to determine the alignment accuracy.

For the merged models we use the default settings of *Metro*, which will have *Metro* select an amount of samples equal to ten times the number of faces of the model. The selected samples include all vertices, but also samples from edge and samples from the face using the similar triangles sampling technique.

5. RESULTS

5.1. Alignment

Results of the alignment of the range scans made from the objects are shown in table 2. The values in this table are the alignment error of each tool based on the minimal distances from the samples of the *aligned model* to its *reference model*. For the real objects the directed Hausdorff distance is dominated by noise. Therefore, we will perform the comparison based on the mean errors only. The minimal mean distance obtained for a particular object is shown in bold. These results show that *RapidForm* performs best in case of the synthetic objects and the *pierrot*, but that *Scanalyze* obtains a better alignment for the *UU-memento*. Note that, although the mean errors of the alignments may differ a factor ten for the mean error, all tools perform a good alignment.

Snapshots of the accurate alignments of the *armadillo* are shown in figure 6. In this figure, each aligned mesh is shown using a different colour. Because these meshes contain no noise, an even distribution of colours is representative for a better alignment.

Model	Dist.	MeshAlign	RapidForm	Scanalyze
<i>UU-memento</i>	E_{hd}	4.9715	5.0315	4.9710
	E_{mean}	0.2052	0.1500	0.1314
<i>pierrot</i>	E_{hd}	5.4113	5.3519	5.3597
	E_{mean}	0.1116	0.0851	0.1397
<i>knot</i>	E_{hd}	0.0308	0.0021	0.1221
	E_{mean}	0.0122	0.0002	0.0127
<i>armadillo</i>	E_{hd}	0.0477	0.0061	0.0357
	E_{mean}	0.0240	0.0028	0.0036
<i>dragon</i>	E_{hd}	0.0320	0.0042	0.0272
	E_{mean}	0.0114	0.0013	0.0030

Table 2

Error (in mm) of samples from the *aligned model* to its *reference model*.

5.2. Merging

The mean of the minimal distances from the from the samples of the *merged model* to its *reference model* are shown in table 3. For each object, the merging is performed for all available alignments. In italic the best merging technique for a particular alignment are highlighted. The best combination of alignment and merging for a particular object are marked in bold. Results from this table show that:

- (i) the mean error of the *merged model* decreases, when the mean error of the alignment is lower. In other words, a more accurate alignment improves the final model.
- (ii) a voxel grid with a higher resolution performs better in case of our synthetic objects.
- (iii) a voxel grid with a lower resolution performs better in case of our physical objects.
- (iv) In case of *RapidForm*, the volumetric merge shows often a better performance than surface zipping.

Now, we will look at two particular features of the final *merged models*: the ear of the *armadillo* and the emblem of the *UU-memento*. The ear is selected for its high curvature features and the emblem for its high level of detail and relief. For the input of the merging tools we only use the alignment created with *RapidForm*.

The results for the ear are shown in figure 7. Notice that *MeshMerge* creates a thick brim along the ear, which becomes smaller if a higher resolution voxel grid is used. Different parameter settings for this tool might improve these results. The results for the surface zipping of *RapidForm* was not able to construct the entire surface of the era and shows a large hole instead. The results of *RapidForm*'s volumetric merges show high similarity with the *reference* ear, except for some small holes.

In case of the noisy emblem, the results of *MeshMerge* together with the result for the lowest resolution voxel grid of *RapidForm* show the most accurate

Model alignment	MeshMerge		RapidForm		
	Volume	Volume	Volume	Volume	Surface
	low res.	high res.	low res.	high res.	-
<i>UU-memento</i>					
-MeshAlign	0.237	0.325	0.287	0.288	0.270
-RapidForm	0.138	0.136	0.124	0.134	0.135
-Scanalyze	0.105	0.104	0.089	0.101	0.113
<i>pierrot</i>					
-MeshAlign	0.083	0.083	0.089	0.099	0.088
-RapidForm	0.049	0.050	0.055	0.067	0.061
-Scanalyze	0.112	0.112	0.118	0.127	0.118
<i>knot</i>					
-MeshAlign	0.051	0.022	0.021	0.017	0.022
-RapidForm	0.045	0.016	0.015	0.011	0.015
-Scanalyze	0.048	0.022	0.020	0.017	0.022
<i>armadillo</i>					
-MeshAlign	0.040	0.030	0.030	0.028	0.036
-RapidForm	0.026	0.013	0.016	0.012	0.015
-Scanalyze	0.027	0.015	0.017	0.014	0.018
<i>dragon</i>					
-MeshAlign	0.023	0.016	0.016	0.015	0.019
-RapidForm	0.017	0.008	0.009	0.007	0.010
-Scanalyze	0.018	0.010	0.011	0.009	0.012

Table 3

Mean error (in mm) of samples from the *merged model* to its *reference model*. For the volumetric merge a low resolution voxel grid (0.37×0.37 mm) and a high resolution voxel grid (0.185×0.185 mm) were used.

reconstructions of the emblem. The *RapidForm*'s volumetric reconstruction using a higher resolution grid shows many small holes and especially surface zipping is not capable of dealing with this amount of noise.

6. CONCLUSIONS AND FUTURE WORK

Most alignment and merging methods are based on heuristics, like the ICP algorithm for the alignment. Such methods are generally believed to work well, but it makes sense to quantify the relative performance of several systems and tools.

The alignment results based on synthetic range scans shows a high accuracy for all alignment tools, with *RapidForm* as the system with the most accurate alignments. This is a good indication for that fact that an ICP based algorithm requires a comprehensive search for the optimal parameter settings with respect to its accuracy. The results obtained using *RapidForm* may be useful as a lower bound of the alignment error for finding parameter settings that optimize the performance of *MeshAlign* and *Scana-*

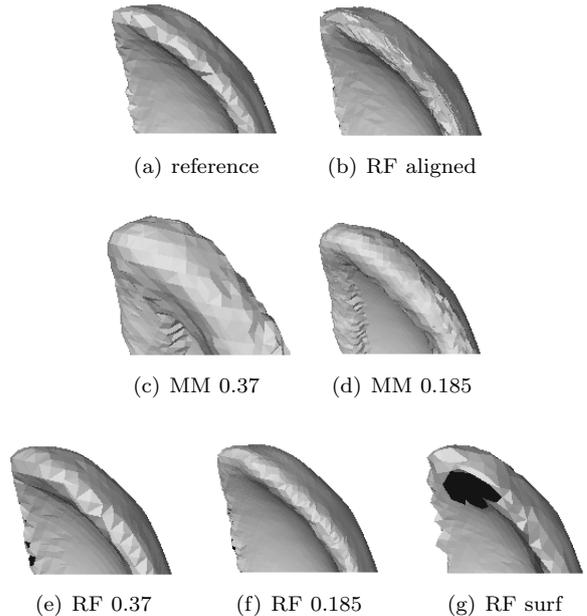


Fig. 7. Snapshots from the ear of the *armadillo* using RapidForm (RF) and MeshMerge (MM).

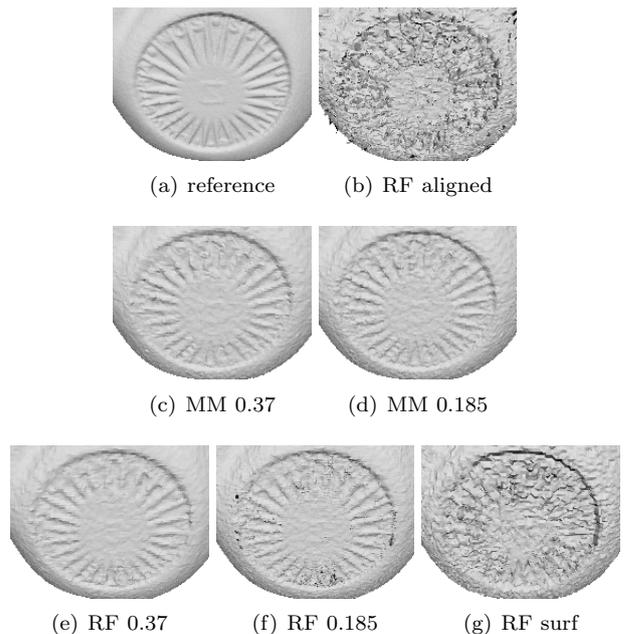


Fig. 8. Snapshots of the emblem of the *UU-memento* using RapidForm (RF) and MeshMerge (MM).

lyze. For the alignments based on laser range scans, the results show no favorite tool.

The evaluation of the merged models, show that even a very small improvement of the alignment results in an improvement of the merged model. This evaluation also shows that increasing the resolution of the voxel grid that is used by the volumetric merge technique will not always result in an improved accuracy of the final reconstructed model. Apparently, this improvement is bounded by the precision of the scanning device.

Visual evaluation of the merge results show that differ-

ent variants of the volumetric merge approach based on a distance field can have a very different output for slanted edges, even if the merged meshes do not contain noise. For a high detailed surface with much noise, volumetric approaches show better performance with respect to the noise reduction and hole filling than the surface zipping approach of *RapidForm*.

As future work, we will perform a more comprehensive research in each of the processes of the scanning pipeline. Increasing the number of object, laser range scanners and reconstruction tools will give a better overview of the current state of the 3D model reconstruction tools. Even though the heuristics seem to work well within this entire process, there is no guarantee on their performance. A promising research direction is to develop techniques that are guaranteed to have a performance depending on input parameters such as scanning resolution and surface curvature.

ACKNOWLEDGEMENTS

This research was supported by the FW6 IST Network of Excellence 506766 AIM@SHAPE. The UUmemento statue is copyrighted by Artihove Art Centre, Bergschenhoek (www.artihove.nl) and artist Maarten Benschop.

REFERENCES

- AIM@SHAPE Repository, April 2005. FW6 IST Network of Excellence 506766. More info on <http://www.aim-at-shape.net:10080/>.
- Callieri, M., Cignoni, P., Ganovelli, F., Montani, C., Pingi, P., R., S., 2003. VCLab's tools for 3D range data processing. In: 4th Int. Symposium on Virtual Reality, Archaeology and Intelligent Cultural Heritage (VAST2003). pp. 9–18.
- Chen, C.-S., Hung, Y.-P., Cheng, J.-B., 1999. RANSAC-based DARCES: a new approach to fast automatic registration of partially overlapping range images. *IEEE Trans. Pattern Analysis and Machine Intelligence (PAMI)* 21 (11), 1229–1234.
- Cheng, J., Don, H., 1991. A graph matching approach to 3-D point correspondences. *Int. Journal of Pattern Recognition and Artificial Intelligence* 5 (3), 399–412.
- Chua, C., Jarvis, R., 1997. Point signatures: A new representation for 3D object recognition. *Int. Journal of Computer Vision* 25 (1), 63–85.
- Chung, D., Yun, I., Lee, S., 1998. Registration of multiple-range views using the reverse-calibration technique. *Pattern Recognition* 31 (4), 457–464.
- Cignoni, P., Rocchini, C., Scopigno, R., 1998. Metro: measuring error on simplified surfaces. *Computer Graphics Forum* 17 (2), 167–174.
- Curless, B., Levoy, M., 1996. A volumetric method for building complex models from range images. In: *Proc. Computer Graphics (SIGGRAPH 96)*. pp. 303–312.
- Higuchi, K., Hebert, M., Ikeuchi, K., 1995. Building 3-D models from unregistered range images. *CVGIP-GMIP* 57 (4), 315–333.
- INUS Tech., April 2005. RapidForm 2004 PP2, the standard software for 3D scanners. More info on <http://www.rapidform.com>.
- Johnson, A., 1997. Spin images: A representation for 3-D surface matching. Ph.D. thesis, Carnegie Mellon University, Pittsburgh.
- Neugebauer, P., 1997. Reconstruction of real-world objects via simultaneous registration and robust combination of multiple range images. *Int. Journal of Shape Modeling* 3 (1-2), 71–90.
- Pulli, K., 1999. Multiview registration for large data sets. In: *Proc. 2nd Int. Conf. on 3D Digital Imaging and Modeling (3DIM)*. pp. 160–168.
- Rocchini, C., Cignoni, P., Ganovelli, F., Montani, C., Pingi, P., Scopigno, R., 2004. The marching intersections algorithm for merging range images. *The Visual Computer* 20 (2-3), 149–164.
- Rusinkiewicz, S., Levoy, M., 2001. Efficient variants of the ICP algorithm. In: *Proc. 3rd Int. Conf. on 3-D Digital Imaging and Modeling (3DIM)*. pp. 145–152.
- Stanford, April 2005. Stanford Computer Graphics Laboratory. More info on <http://graphics.stanford/>.
- Turk, G., Levoy, M., 1994. Zipped polygon meshes from range images. In: *Proc. Computer Graphics (SIGGRAPH 94)*. pp. 311–318.
- VCLab, April 2005. ISTI-CNR Visual Computing Laboratory. Meshalign v.2 and Meshmerge. More info on <http://vcg.isti.cnr.it/>.
- Wyngaerd, J., Gool, L., Proesmans, M., 1999. Invariant-based registration of surface patches. In: *IEEE Int. Conf. on Computer Vision*. pp. 301–306.